

# USING THE LCD JIB MOUNT 3/8"

1. Use the wing nuts to connect the Bracket to the EZ FX Jib as shown in FIG A.

2. Attach the Avenger D250 grip head to the spigot on the end of the bracket. FIG B

3. Attach one of the extension rods to the D250 Grip head. Face the rod toward your preferred monitor placement position. Tighten securely.

4. Attach the 2nd rod to extend out further. (optional)

5. Attach your LCD monitor to the 1.4 inch treads on the end of the 6.5 inch ball joint rod.

6. Connect the ball joint rod to the end of the extension rods.

NOTE: FOR SAFETY, BE SURE TO SECURE ALL CONNECTION KNOBS FIRMLY.

FIG A.

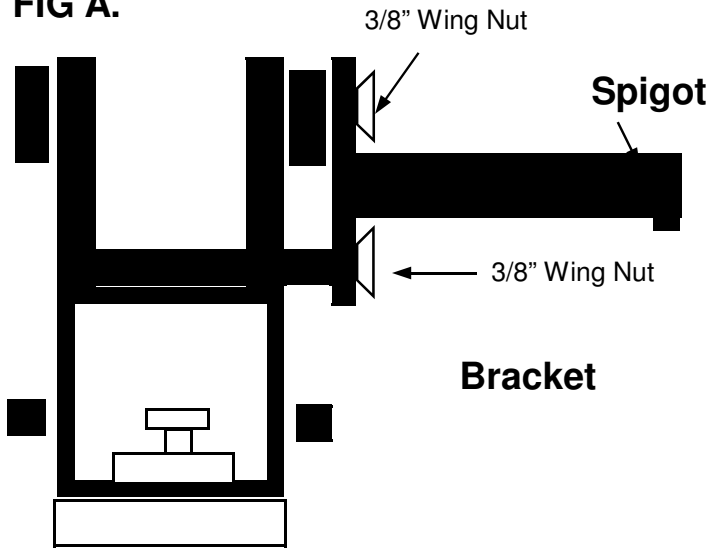


FIG B.

